

CERAForge HD PORCELAIN TILE



CERAForge HD PORCELAIN TILE



12" x 24" CERAForge LITHIUM HD RECTIFIED PORCELAIN TILE

CERAForge HD PORCELAIN TILE



32" x 32" CERAForge LITHIUM HD RECTIFIED PORCELAIN TILE
65-533



24" x 24" CERAForge LITHIUM HD RECTIFIED PORCELAIN TILE
69-455



16" x 32" CERAForge LITHIUM HD RECTIFIED PORCELAIN TILE
65-528



2x 2" CERAForge LITHIUM HD
PORCELAIN MOSAICS 63-601



3" x 24" CERAForge LITHIUM HD PORCELAIN BULLNOSE
69-471



12" x 24" CERAForge LITHIUM HD RECTIFIED PORCELAIN TILE
69-423

CERAForge HD PORCELAIN TILE



12" x 24" CERAForge CHROMIUM HD RECTIFIED PORCELAIN TILE

CERAForge HD PORCELAIN TILE



32" x 32" CERAForge CHROMIUM HD RECTIFIED PORCELAIN TILE
65-532



24" x 24" CERAForge CHROMIUM HD RECTIFIED PORCELAIN TILE
69-454



16" x 32" CERAForge CHROMIUM HD RECTIFIED PORCELAIN TILE
65-527



2x 2" CERAForge CHROMIUM HD
PORCELAIN MOSAICS 63-600



3" x 24" CERAForge CHROMIUM HD PORCELAIN BULLNOSE
69-470



12" x 24" CERAForge CHROMIUM HD RECTIFIED PORCELAIN TILE
69-422

CERAForge HD PORCELAIN TILE



12" x 24" CERAForge TITANIUM HD RECTIFIED PORCELAIN TILE

CERAForge HD PORCELAIN TILE




32" x 32" CERAForge TITANIUM HD RECTIFIED PORCELAIN TILE
65-534



24" x 24" CERAForge TITANIUM HD RECTIFIED PORCELAIN TILE
69-456




16" x 32" CERAForge TITANIUM HD RECTIFIED PORCELAIN TILE
65-529



2" x 2" CERAForge TITANIUM HD
PORCELAIN MOSAICS 63-602



3" x 24" CERAForge TITANIUM HD PORCELAIN BULLNOSE
69-472

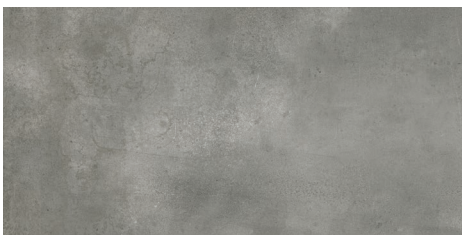

12" x 24" CERAForge TITANIUM HD RECTIFIED PORCELAIN TILE
69-424

CERAForge HD PORCELAIN TILE



12" x 24" CERAForge IRON HD RECTIFIED PORCELAIN TILE

CERAForge HD PORCELAIN TILE



32" x 32" CERAForge IRON HD RECTIFIED PORCELAIN TILE
65-535




24" x 24" CERAForge IRON HD RECTIFIED PORCELAIN TILE
69-457



16" x 32" CERAForge IRON HD RECTIFIED PORCELAIN TILE
65-530



2x 2" CERAForge IRON HD PORCELAIN
MOSAICS 63-603



3" x 24" CERAForge IRON HD PORCELAIN BULLNOSE
69-473



12" x 24" CERAForge IRON HD RECTIFIED PORCELAIN TILE
69-425

CERAForge HD PORCELAIN TILE



12" x 24" CERAForge OXIDE HD RECTIFIED PORCELAIN TILE

CERAForge HD PORCELAIN TILE




32" x 32" CERAForge OXIDE HD RECTIFIED PORCELAIN TILE
65-531




24" x 24" CERAForge OXIDE HD RECTIFIED PORCELAIN TILE
69-453



16" x 32" CERAForge OXIDE HD RECTIFIED PORCELAIN TILE
65-526



2" x 2" CERAForge OXIDE HD PORCELAIN
MOSAICS 63-599



3" x 24" CERAForge OXIDE HD PORCELAIN BULLNOSE
69-469



12" x 24" CERAForge OXIDE HD RECTIFIED PORCELAIN TILE
69-421

CERAForge HD PORCELAIN TILE

PACKAGING INFORMATION

DESCRIPTION	ITEM CODE					LBS/BOX	PCS/BOX	SQFT/BOX	BOXES/SKID	SQFT/SKID
	LITHIUM	TITANUM	CHROMIUM	IRON	OXIDE					
32" x 32" CERAForge HD RECTIFIED PORCELAIN TILE	65-533	65-534	65-532	65-535	65-531	70.40	2	13.78	44	551.20
16" x 32" CERAForge HD RECTIFIED PORCELAIN TILE	65-528	65-529	65-527	65-530	65-526	70.40	4	13.78	38	523.64
24" x 24" CERAForge HD RECTIFIED PORCELAIN TILE	69-455	69-456	69-454	69-457	69-453	70.40	4	15.50	28	434.00
12" x 24" CERAForge HD RECTIFIED PORCELAIN TILE	69-423	69-424	69-422	69-425	69-421	70.40	8	15.50	28	434.00
3" X 24" CERAForge HD PORCELAIN BULLNOSE	69-471	69-472	69-470	69-473	69-469	33.00	15	N/A	56	840 PCS.
2" x 2" CERAForge HD PORCELAIN MOSAICS	63-601	63-602	63-600	63-603	63-599	38.45	10	9.69	45	436.05

GENERAL SPECIFICATIONS

DESCRIPTION	METHOD	UNIT	32" x 32"	16" x 32"	24" x 24"	12" x 24"
THICKNESS		mm – in	10.8 mm – 7/16"	10.8 mm – 7/16"	9.2 mm – 3/8"	9.2 mm – 3/8"
WATER ABSORPTION	ASTM C-373 / EN ISO 10545-3	(%)	≤ 0.5	≤ 0.5	≤ 0.5	≤ 0.5
ABRASION RESISTANCE	ASTM C-1027 / EN ISO 10545-7	(PEI)	4	4	4	4
SCRATCH HARDNESS		(Mohs)	6	6	6	6
BREAKING STRENGTH	EN ISO 10545-4	(lbf)	≥ 450	≥ 450	≥ 450	≥ 450
STAIN RESISTANCE	ASTM C-1378		Class A	Class A	Class A	Class A
CHEMICAL RESISTANCE	EN ISO 10545-13	(GL)	Class A – Res.	Class A – Res.	Class A – Res.	Class A – Res.
FROST RESISTANCE	EN ISO 10545-12		Resistant	Resistant	Resistant	Resistant
STATIC COEFFICIENT OF FRICTION (WET)	ASTM C-1028	(μ)	≥ 0.60	≥ 0.60	≥ 0.60	≥ 0.60
STATIC COEFFICIENT OF FRICTION (DRY)	ASTM C-1028	(μ)	≥ 0.60	≥ 0.60	≥ 0.60	≥ 0.60
DCOF (WET)	ANSI B101.3		≥ 0.50	≥ 0.50	≥ 0.50	≥ 0.50
SHADE VARIATION			V3	V3	V3	V3

* While the information has been presented with all due care, Anatolia Tile and Stone Inc. does not warrant the information is free from errors or omission. Actual colors may vary depending on product.



24" x 24" CERAForge LITHIUM HD PORCELAIN TILE